
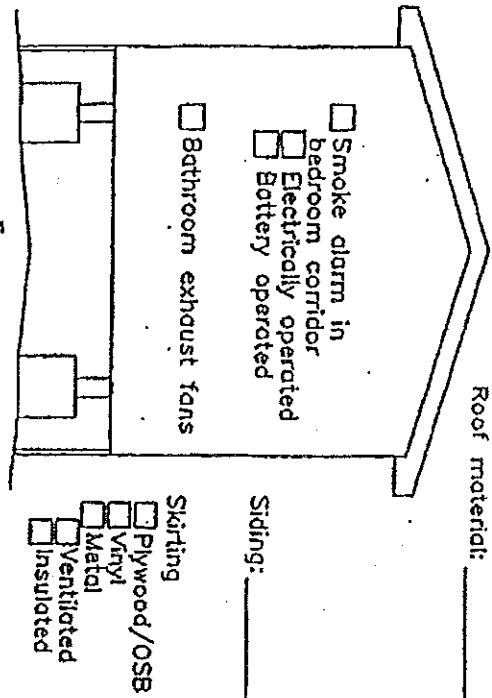


# Mobile Home Requirements

CAN/CSA-2240.4.1-92  
National Building Code of Canada

## Site Plan

- Note distances to property lines
- Label adjacent streets and allies
- Indicate location of ground anchors (if applicable) with an 'X'.

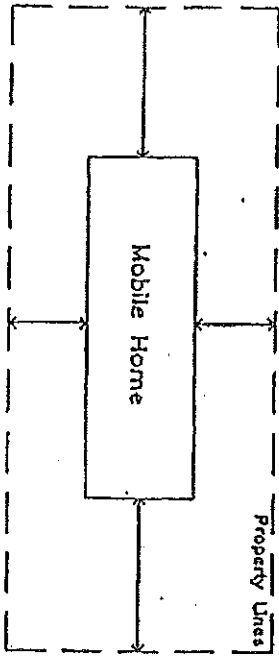

- Min 2% grading
- Sand/dirt/gravel topping
- Poly ground cover
- Gravel sub-base

## Foundation

- Type of pier:
- Railway ties
  - Treated timbers ( \_\_\_\_\_ x \_\_\_\_\_ )
  - Concrete blocks
  - Wood crib

Note:  
-Piers can not be higher than they are wide  
-Blocking is to be installed at the top of the pier on the exterior of the floor beams to prevent lateral movement

Type of footing (if required)

- Concrete Pod

Length: \_\_\_\_\_  
Width: \_\_\_\_\_  
Depth: \_\_\_\_\_

3 layers of treated 2x6 wood crib

Length: \_\_\_\_\_  
Width: \_\_\_\_\_

Concrete piles

Diameter: \_\_\_\_\_  
Depth: \_\_\_\_\_

## Information

The following is typically found on the inside of a kitchen cupboard or electrical panel

Year built: \_\_\_\_\_  
Manufacturer: \_\_\_\_\_  
Serial No.: \_\_\_\_\_  
CSA No.: \_\_\_\_\_  
Pier Spacing: \_\_\_\_\_  
Length: \_\_\_\_\_  
Width: \_\_\_\_\_

## Anchorage

Ground anchors installed 40 feet apart

If ground anchors are not to be installed then the following information is to be provided:

Weight: \_\_\_\_\_  
Distance between floor beams: \_\_\_\_\_  
Height of pier: \_\_\_\_\_  
Width of pier: \_\_\_\_\_

## Intended Renovations (If Any):

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

Owner's name: \_\_\_\_\_  
Street Address: \_\_\_\_\_